




* SEE TABLE FOR TECHNICAL CHARACTERISTIC FOR FUSES, WIRE DIMENSIONS AND HEATER USE


POWER SUPPLY: 400V 3~50/60Hz			HEATER CONNECTIONS (S1+S2+S3) kW											
Pn(kW)	In(A)	Qmin (mm ²)	S1		S2		S3							
			E1	E2	E3	E4	E5	E6	E7	E8	E9	E10		
120	173	70	12+	12+	12+	12+	12+	12+	12+	12+	12+	12+	12+	12+

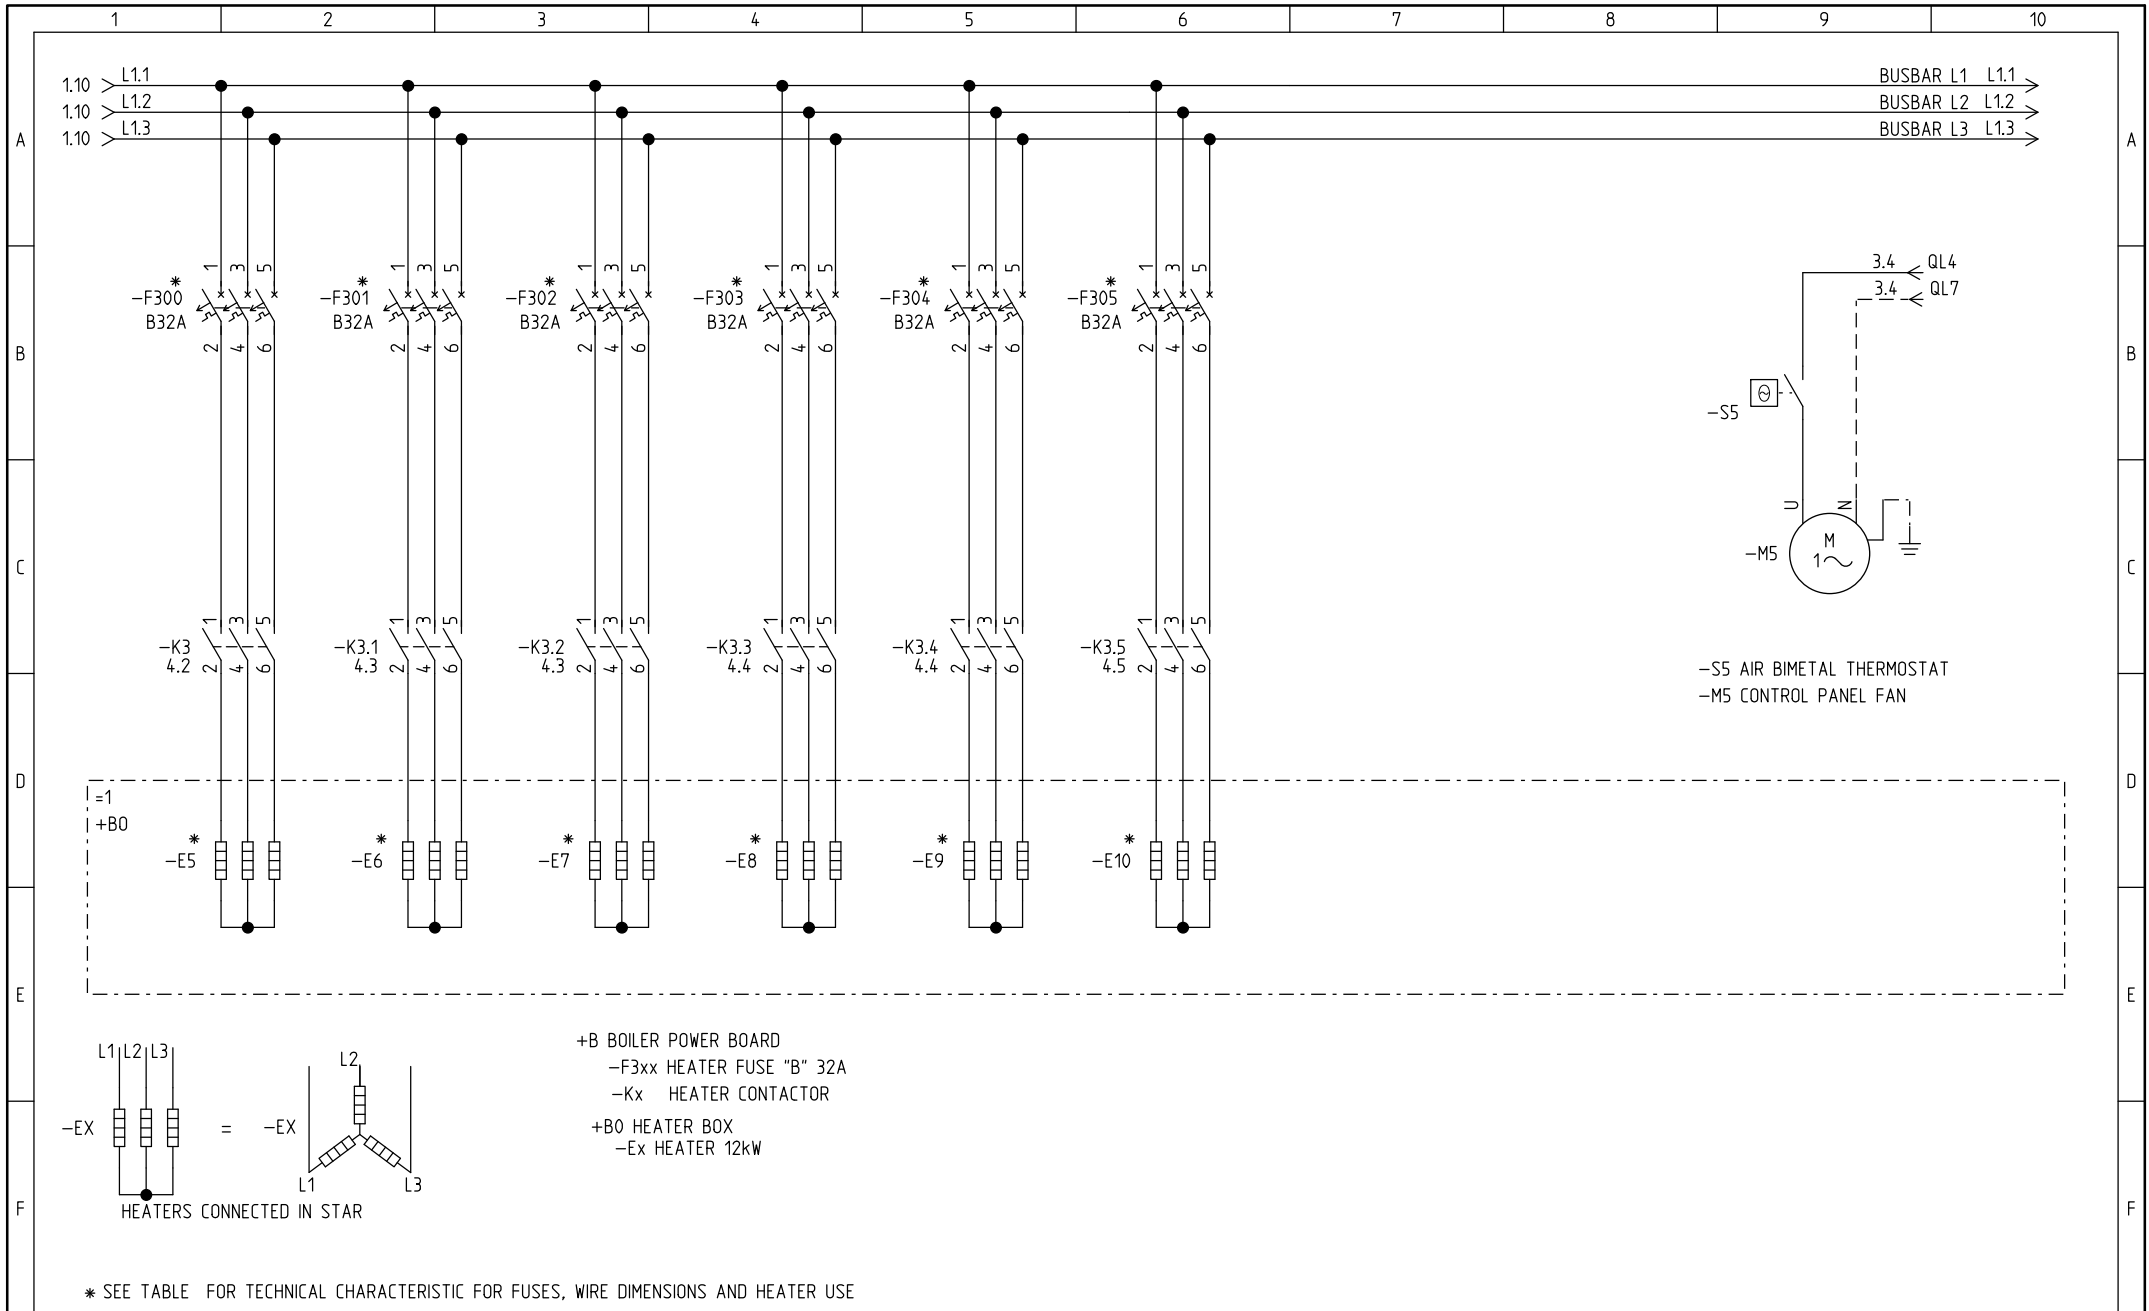

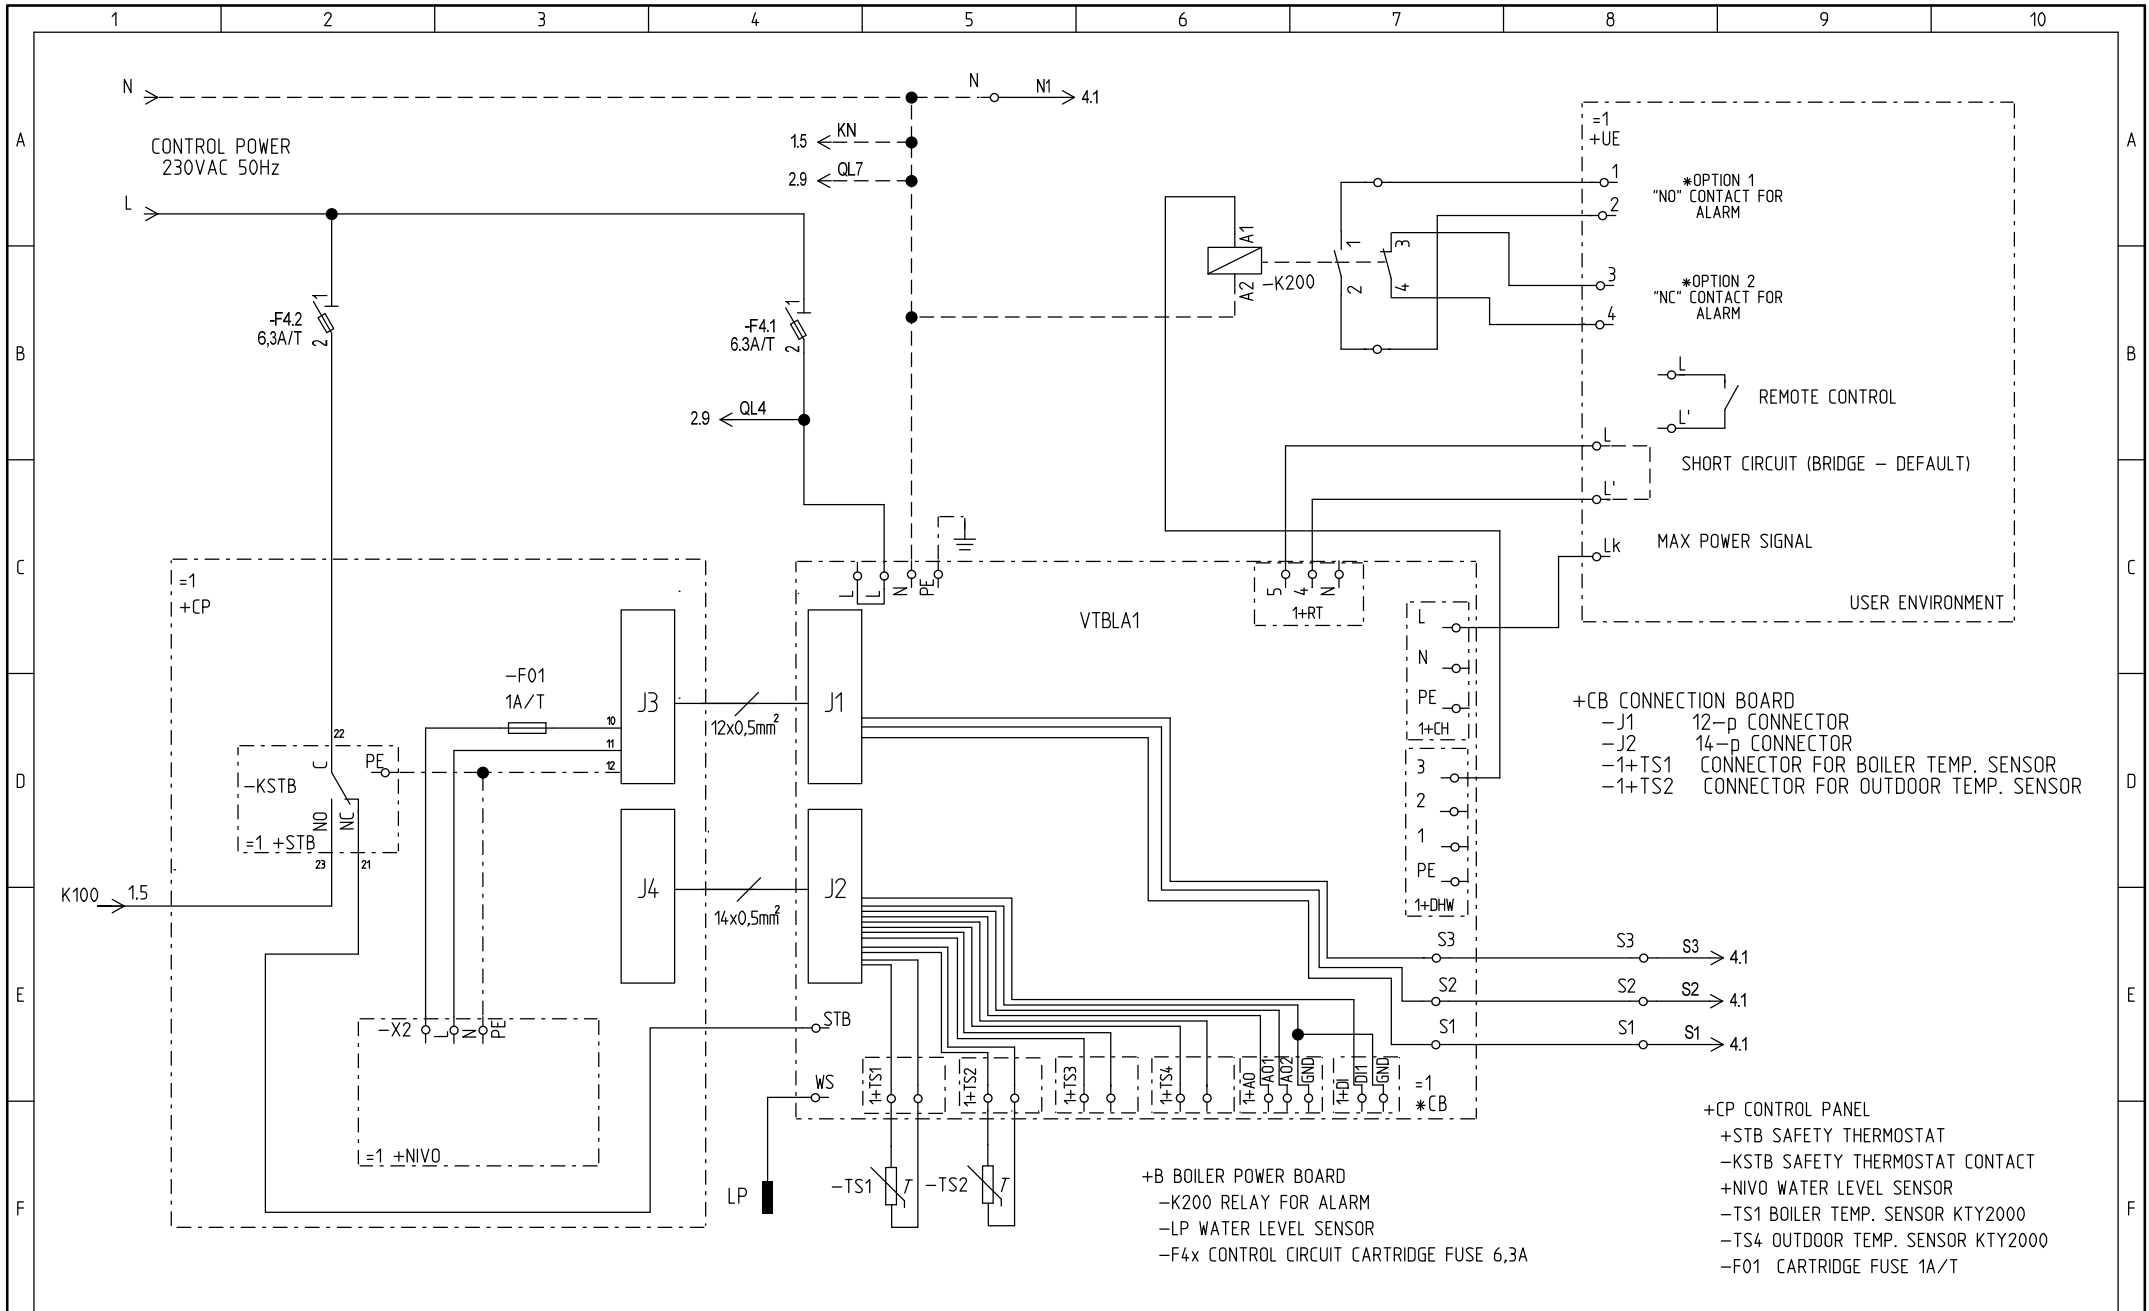

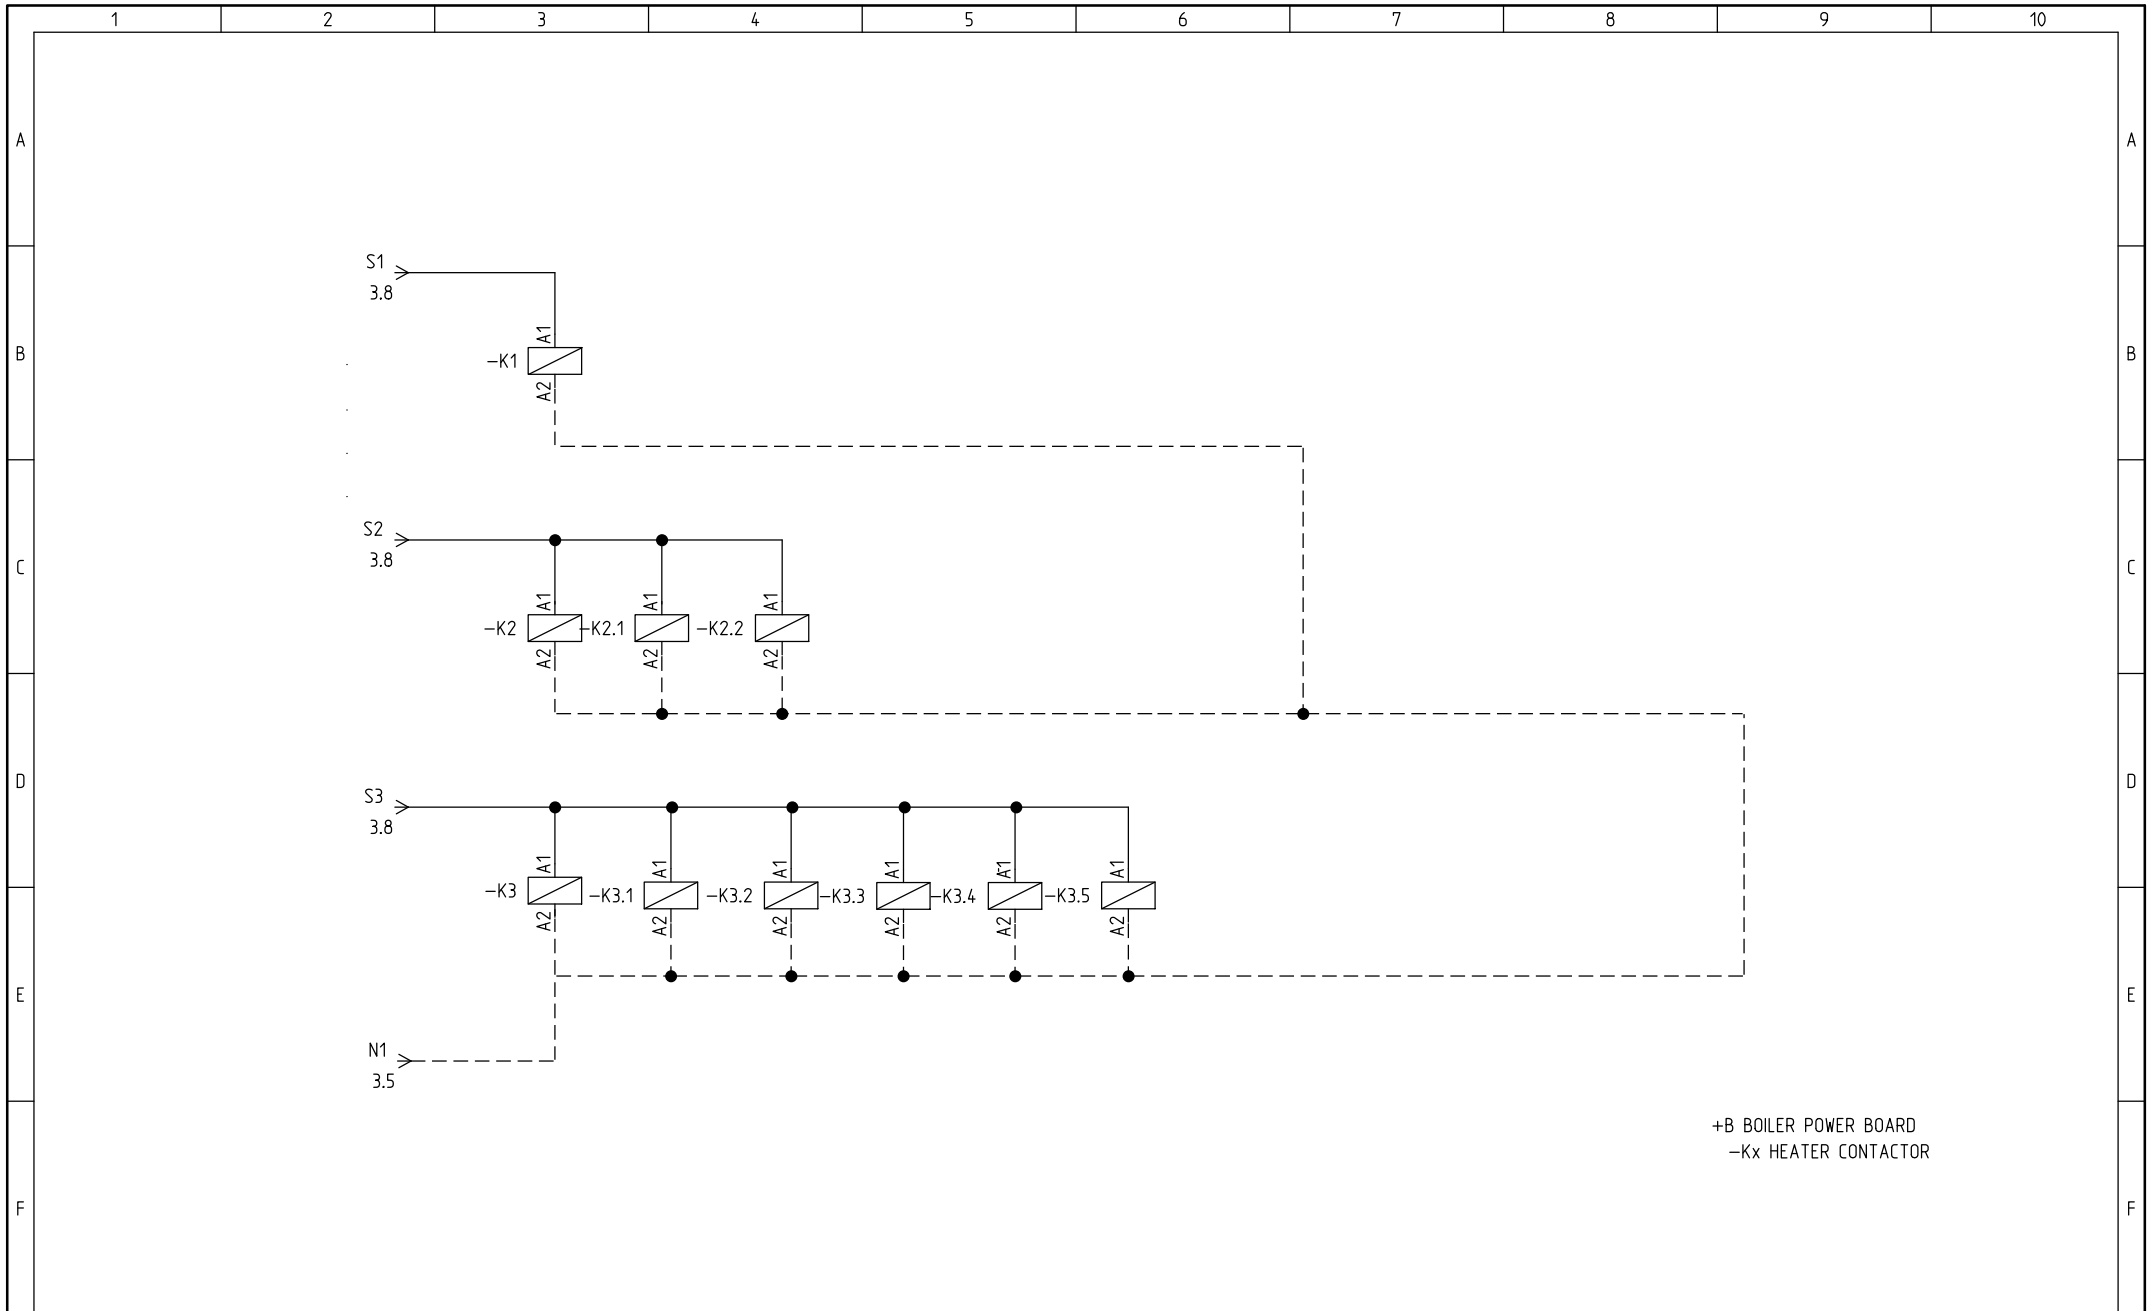

+B BOILER POWER BOARD
-Kx HEATER CONTACTOR

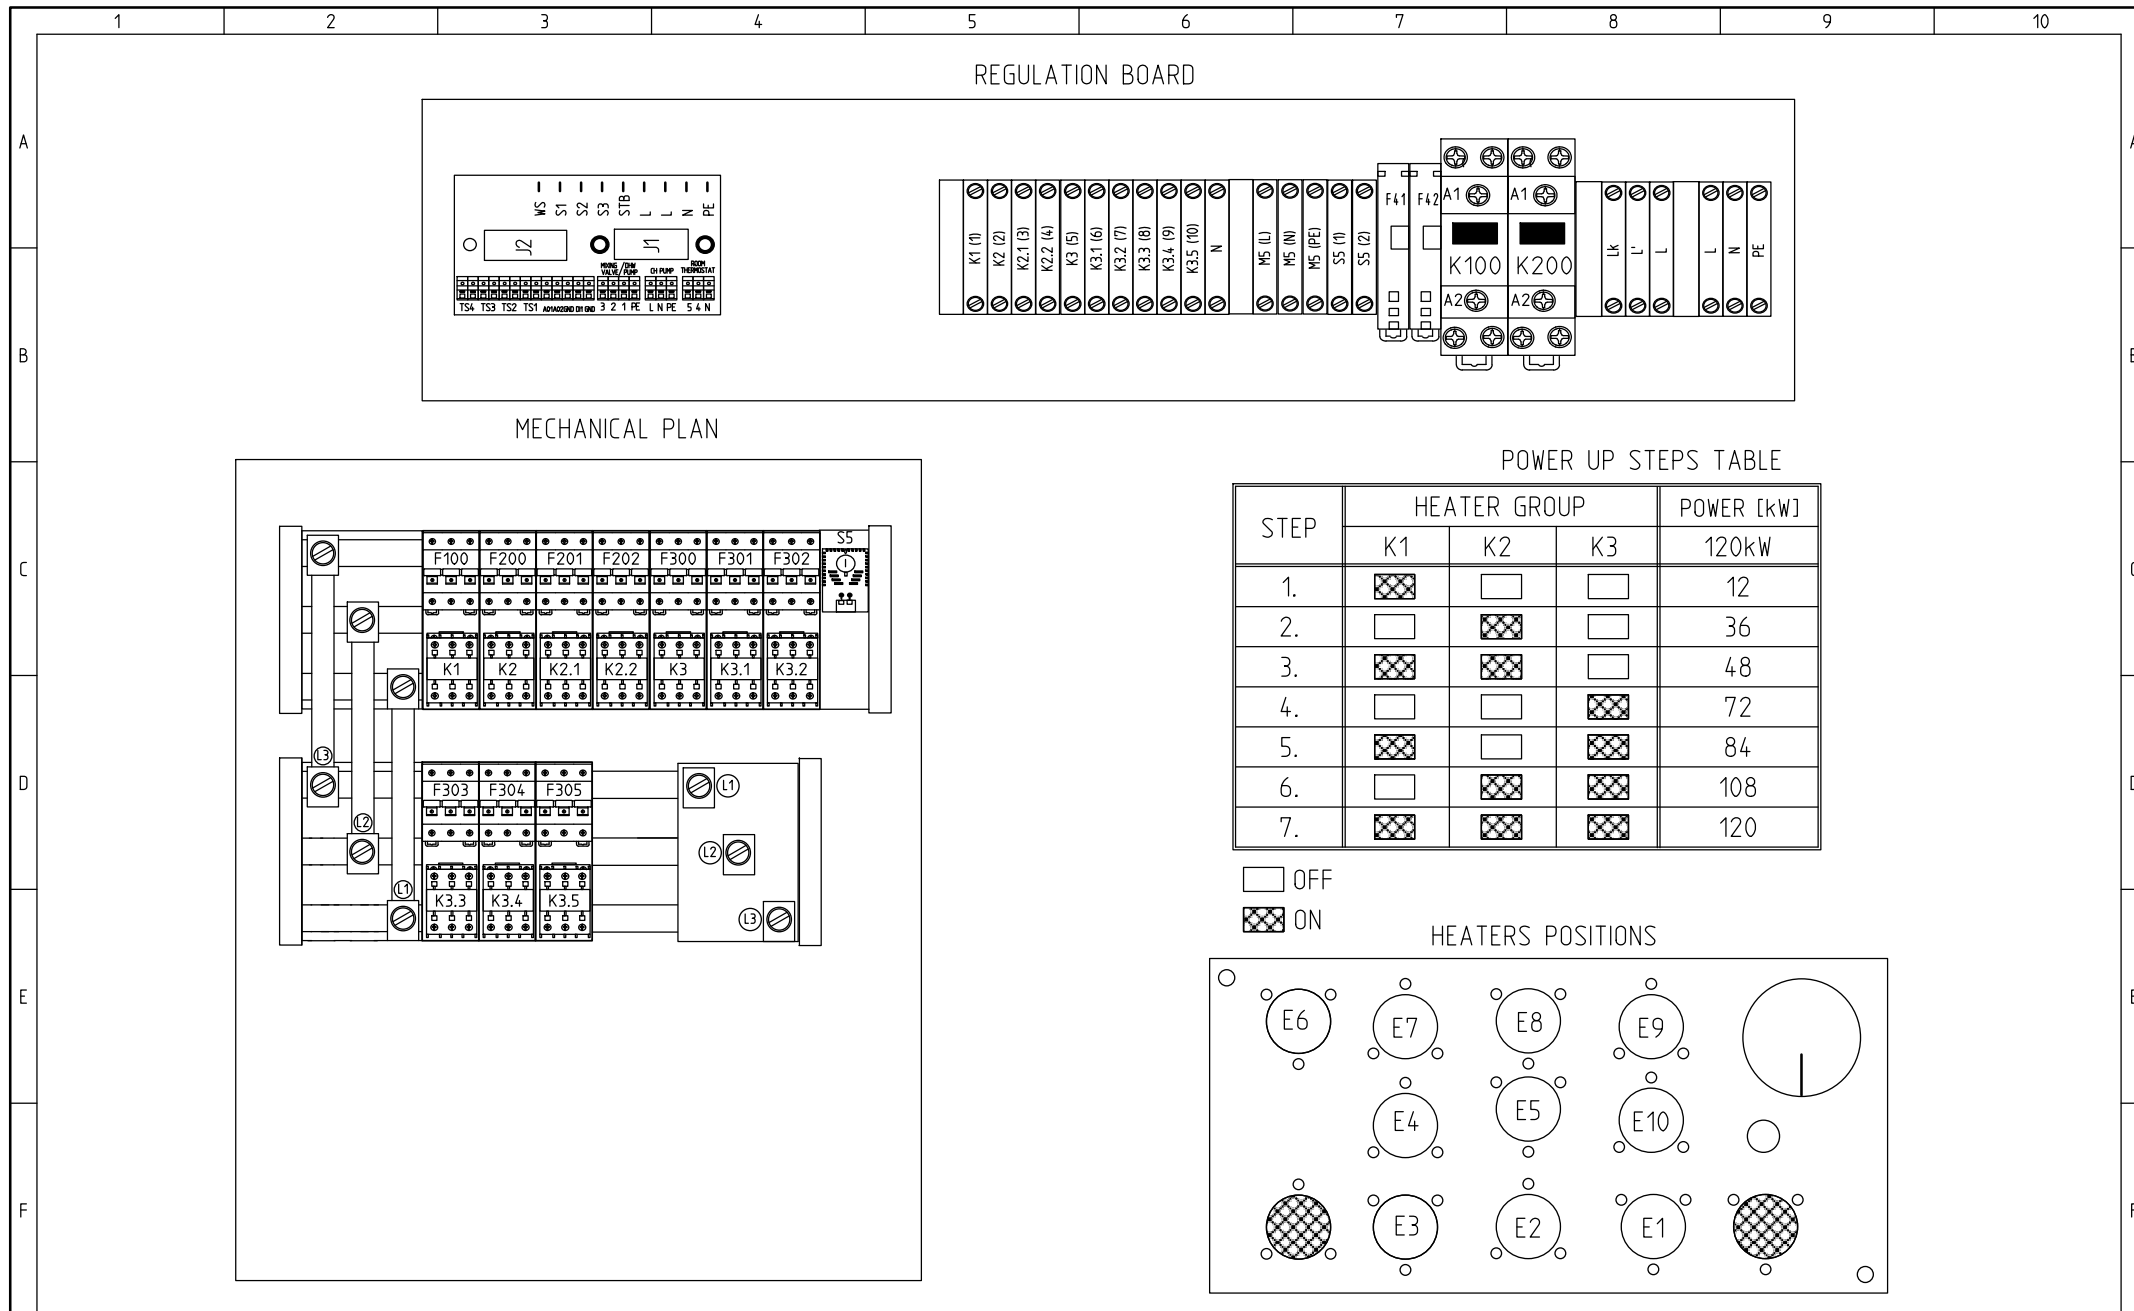

MECHANICAL PLAN

REGULATION BOARD

POWER UP STEPS TABLE

STEP	HEATER GROUP			POWER [kW]
	K1	K2	K3	120kW
1.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	12
2.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	36
3.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	48
4.	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	72
5.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	84
6.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	108
7.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	120

OFF
 ON

HEATERS POSITIONS

